



Connect to the World

Founded in 1996, Weipu is one of the leading waterproof connector manufacturers in China. We have R&D professionals, up-to-date machinery, a fully equipped in-house testing lab and a customer-focused quality management system in accordance with ISO 9001. Weipu operates in compliance with the highest industry standards with certifications of RoHs, CE, CSA, and UL concerning quality, safety and sustainability.


Specialised in circular waterproof connectors, we offer push-pull, threaded and bayonet connectors, ranging from 3A to 400A, 2pin to 61pin, and IP44 to IP68, which can be applied to a wide variety of industrial applications operating in challenging environments.



Workshop building



In-house Test Lab Equipment

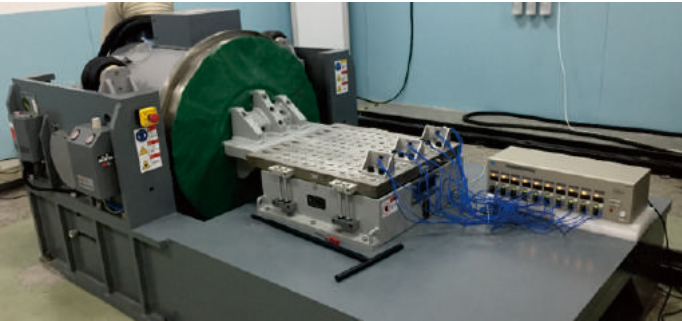

Vibration Test Equipment




Electric Current Break Test Equipment



Optical Comparator




Waterproof IP Rating Test Chamber

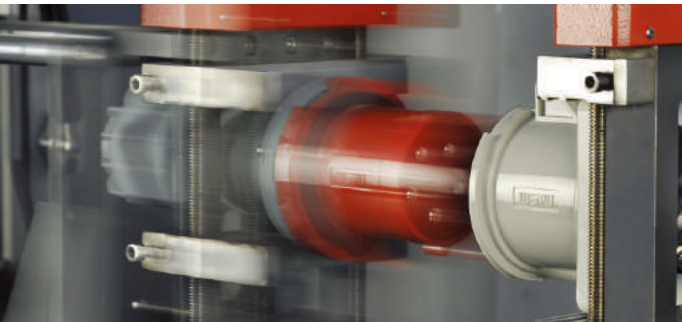

Mating Cycle Life Time Test Machine




Accurate Size Test Equipment

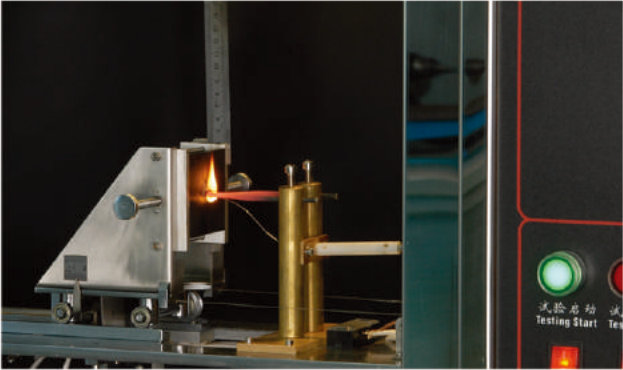



● WP Series

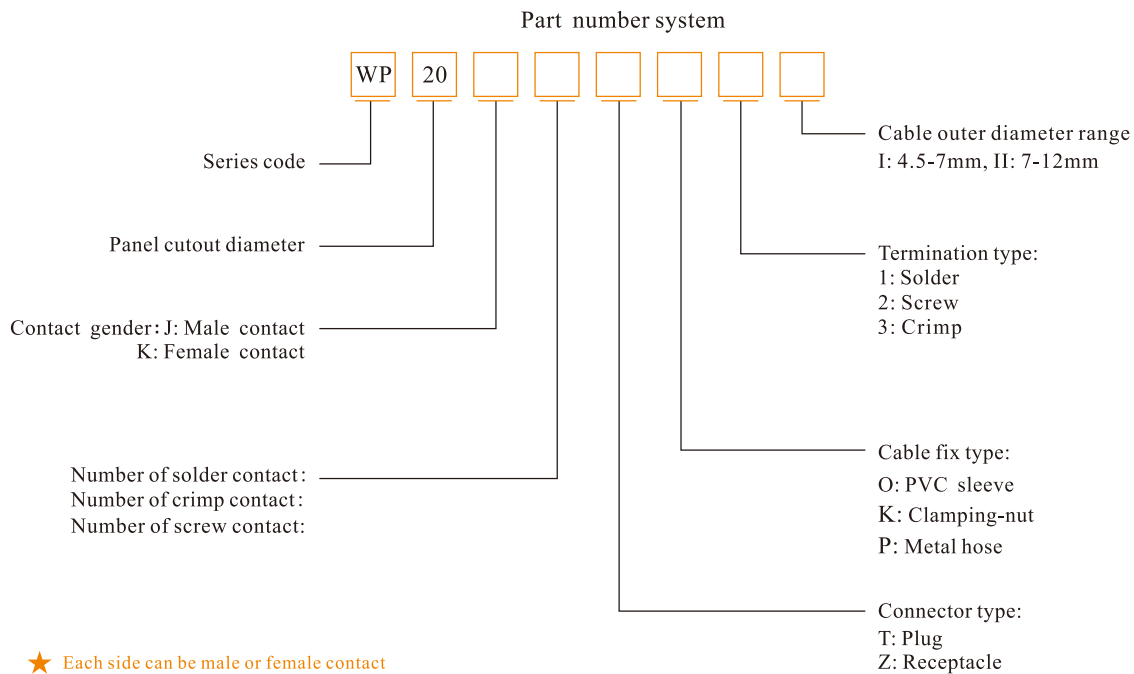

Material and spec

Coupling	Bayonet
Shell	Nylon 66 / Zinc alloy
Insert material	PPS, max temperature 260 °C
Contact material	Brass with gold plating
Contact plating	Gold Plating
Termination	Solder: ϕ 1mm, ϕ 2mm, ϕ 3mm contact Screw: ϕ 3mm contact
Mating cycle	500
Temperature range	-40°C ~ +85°C

Crimp contact spec

SF16, SA16, SP17, SY17 WS16, WF16, WY16	2	3	4
Male contact face view			
Rated current (A)	10	10	5
Contact diameter(mm)	Ø1.5X2	Ø1.5X3	Ø1X4
Rated voltage (AC.V)	500	500	400
Test voltage(AC.V) 1 min	1500	1500	1200
Contact resistance(mΩ)	2.5	2.5	5
Insulation resistance (MΩ)	2000	2000	2000

SF20, SA20, SP21, SY21 WS20 WF20, WY20, WP20	2	3	4	5	7	7B	8
Male contact face view							
Rated current (A)	25	25	25	10	10	5	5
Contact diameter(mm)	Ø2.5X2	Ø2.5X3	Ø2.5X4	Ø1.5X5	Ø1.5X7	Ø1X7	Ø1X8
Rated voltage (AC.V)	500	500	500	500	500	400	400
Test voltage(AC.V) 1 min	1500	1500	1500	1500	1500	1200	1200
Contact resistance(mΩ)	1	1	1	2.5	2.5	5	5
Insulation resistance (MΩ)	2000	2000	2000	2000	2000	2000	2000


WS24、WF24、WY24	4	5	9	12
Male contact face view				
Rated current (A)	25	25	10	5
Contact diameter(mm)	Ø2.5X4	Ø2.5X5	Ø1.5X9	Ø1X12
Rated voltage (AC.V)	500	500	500	400
Test voltage(AC.V) 1 min	1500	1500	1500	1200
Contact resistance(mΩ)	1	1	2.5	5
Insulation resistance (MΩ)	2000	2000	2000	2000

SA28, SP29, SY29 WS28, WF28, WY28	2	7	12	15	19
Male contact face view					
Rated current (A)	50	25	10	5	5
Contact diameter(mm)	Ø3.5X2	Ø2.5X7	Ø1.5X12	Ø1X15	Ø1X19
Rated voltage (AC.V)	500	500	500	400	400
Test voltage(AC.V) 1 min	1500	1500	1500	1200	1200
Contact resistance(mΩ)	0.5	1	2.5	5	5
Insulation resistance (MΩ)	2000	2000	2000	2000	2000

Crimp contact

5A Crimp contact

- ※ Contact diameter: $\phi 1$
- ※ Material: Brass with gold plating
- ※ Contact resistance: $5\text{m}\Omega$



5A Male crimp contact

For SF, SA, SP, SY, WP, WS/WF/WY16-28

Wire size	Stripping length	Male crimp contact p/n	Crimping tool p/n	Removal tool p/n
0.20-0.52mm ² AWG 24-20	5.5mm	YJ1-17-0.52AU	CTW-0.14/4	RT-1.0


5A Female crimp contact

For SF, SA, SP, SY, WP, WS/WF/WY16-28

Wire size	Stripping length	Female crimp contact p/n	Crimping tool p/n	Removal tool p/n
0.20-0.52mm ² AWG 24-20	5.5mm	YK1-17-0.52AU	CTW-0.14/4	RT-1.0

10A Crimp contact

- ※ Contact diameter: $\phi 1.5$
- ※ Material: Brass with gold plating
- ※ Contact resistance: $2.5\text{m}\Omega$

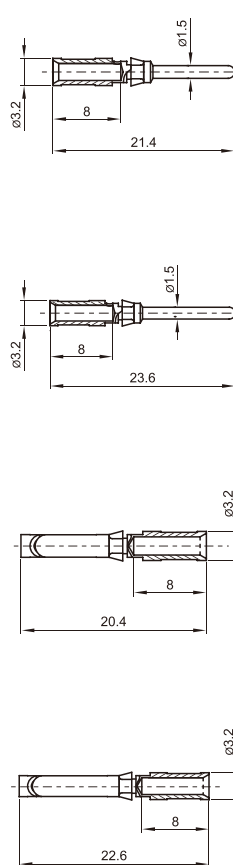

10A Male crimp contact

For SF, SA, SP, SY, WP, WS/WF/WY16-28

Wire size	Stripping length	Male crimp contact p/n	Crimping tool p/n	Removal tool p/n
0.14-0.37mm ² AWG 26-22	8mm	YJ1.5-21.4-0.37AU	CTW-0.14/4	RT-1.5
0.5mm ² AWG 20	8mm	YJ1.5-21.4-0.5AU	CTW-0.14/4	RT-1.5
0.75-1.0mm ² AWG 18	8mm	YJ1.5-21.4-1.0AU	CTW-0.14/4	RT-1.5
1.5mm ² AWG 16	8mm	YJ1.5-21.4-1.5AU	CTW-0.14/4	RT-1.5
2.5mm ² AWG 14	8mm	YJ1.5-21.4-2.5AU	CTW-0.14/4	RT-1.5

10A Male crimp contact

For WS/WF/WY32-55

Wire size	Stripping length	Male crimp contact p/n	Crimping tool p/n	Removal tool p/n
0.14-0.37mm ² AWG 26-22	8mm	YJ1.5-23.6-0.37AU	CTW-0.14/4	RT-1.5
0.5mm ² AWG 20	8mm	YJ1.5-23.6-0.5AU	CTW-0.14/4	RT-1.5
0.75-1.0mm ² AWG 18	8mm	YJ1.5-23.6-1.0AU	CTW-0.14/4	RT-1.5
1.5mm ² AWG 16	8mm	YJ1.5-23.6-1.5AU	CTW-0.14/4	RT-1.5
2.5mm ² AWG 14	8mm	YJ1.5-23.6-2.5AU	CTW-0.14/4	RT-1.5

10A Female crimp contact

For SF, SA, SP, SY, WP, WS/WF/WY16-28

Wire size	Stripping length	Female crimp contact p/n	Crimping tool p/n	Removal tool p/n
0.14-0.37mm ² AWG 26-22	8mm	YK1.5-20.4-0.37AU	CTW-0.14/4	RT-1.5
0.5mm ² AWG 20	8mm	YK1.5-20.4-0.5AU	CTW-0.14/4	RT-1.5
0.75-1.0mm ² AWG 18	8mm	YK1.5-20.4-1.0AU	CTW-0.14/4	RT-1.5
1.5mm ² AWG 16	8mm	YK1.5-20.4-1.5AU	CTW-0.14/4	RT-1.5
2.5mm ² AWG 14	8mm	YK1.5-20.4-2.5AU	CTW-0.14/4	RT-1.5


10A Female crimp contact

For WS/WF/WY32-55

Wire size	Stripping length	Female crimp contact p/n	Crimping tool p/n	Removal tool p/n
0.14-0.37mm ² AWG 26-22	8mm	YK1.5-22.6-0.37AU	CTW-0.14/4	RT-1.5
0.5mm ² AWG 20	8mm	YK1.5-22.6-0.5AU	CTW-0.14/4	RT-1.5
0.75-1.0mm ² AWG 18	8mm	YK1.5-22.6-1.0AU	CTW-0.14/4	RT-1.5
1.5mm ² AWG 16	8mm	YK1.5-22.6-1.5AU	CTW-0.14/4	RT-1.5
2.5mm ² AWG 14	8mm	YK1.5-22.6-2.5AU	CTW-0.14/4	RT-1.5

25A Crimp contact

- ※ Contact diameter: $\phi 2.5$
- ※ Material: Brass with gold plating
- ※ Contact resistance: $1\text{m}\Omega$



25A Male crimp contact

For SF, SA, SP, SY, WP, WS/WF/WY16-28

Wire size	Stripping length	Male crimp contact p/n	Crimping tool p/n	Removal tool p/n
0.75-1.0mm ² AWG 18	8mm	YJ2.5-21.4-1.0AU	CTW-0.14/4	RT-2.5
1.5mm ² AWG 16	8mm	YJ2.5-21.4-1.5AU	CTW-0.14/4	RT-2.5
2.5mm ² AWG 14	8mm	YJ2.5-21.4-2.5AU	CTW-0.14/4	RT-2.5
4.0mm ² AWG 12	8mm	YJ2.5-21.4-4.0AU	CTW-0.14/4 CT-4/10	RT-2.5

25A Male crimp contact

For WS/WF/WY32-55

Wire size	Stripping length	Male crimp contact p/n	Crimping tool p/n	Removal tool p/n
0.75-1.0mm ² AWG 18	8mm	YJ2.5-23.6-1.0AU	CTW-0.14/4	RT-2.5
1.5mm ² AWG 16	8mm	YJ2.5-23.6-1.5AU	CTW-0.14/4	RT-2.5
2.5mm ² AWG 14	8mm	YJ2.5-23.6-2.5AU	CTW-0.14/4	RT-2.5
4.0mm ² AWG 12	8mm	YJ2.5-23.6-4.0AU	CTW-0.14/4 CT-4/10	RT-2.5


Crimp contact

25A Crimp contact

※ Contact diameter: $\varnothing 2.5$

※ Material: Brass with gold plating

※ Contact resistance: $1\text{m}\Omega$



25A Female crimp contact

For SF, SA, SP, SY, WP, WS / WF / WY16-28

Wire size		Stripping length	Female crimp contact p/n	Crimping tool p/n	Removal tool p/n
0.75-1.0mm ²	AWG 18	8mm	YK2.5-20-1.0AU	CTW-0.14/4	RT-2.5
1.5mm ²	AWG 16	8mm	YK2.5-20-1.5AU	CTW-0.14/4	RT-2.5
2.5mm ²	AWG 14	8mm	YK2.5-20-2.5AU	CTW-0.14/4	RT-2.5
4.0mm ²	AWG 12	8mm	YK2.5-20-4.0AU	CTW-0.14/4 CT-4/10	RT-2.5

25A Female crimp contact

For WS / WF / WY32-55


Wire size		Stripping length	Female crimp contact p/n	Crimping tool p/n	Removal tool p/n
0.75-1.0mm ²	AWG 18	8mm	YK2.5-22.2-1.0AU	CTW-0.14/4	RT-2.5
1.5mm ²	AWG 16	8mm	YK2.5-22.2-1.5AU	CTW-0.14/4	RT-2.5
2.5mm ²	AWG 14	8mm	YK2.5-22.2-2.5AU	CTW-0.14/4	RT-2.5
4.0mm ²	AWG 12	8mm	YK2.5-22.2-4.0AU	CTW-0.14/4 CT-4/10	RT-2.5

50A Crimp contact

※ Contact diameter: $\varnothing 3.5$

※ Material: copper

※ Contact resistance: $0.5\text{m}\Omega$



50A Male crimp contact

For WS / WF / WY32-55

Wire size		Stripping length	Male crimp contact p/n	Crimping tool p/n	Removal tool p/n
1.5mm	AWG 16	10mm	YJ3.5-31-1.5AU	CTW-0.14/4	RT-3.5
2.5mm ²	AWG 14	10mm	YJ3.5-31-2.5AU	CTW-0.14/4	RT-3.5
4.0mm ²	AWG 12	10mm	YJ3.5-31-4.0AU	CTW-0.14/4 CT-4/10	RT-3.5
6.0mm ²	AWG 10	10mm	YJ3.5-31-6.0AU	CT-4/10	RT-3.5
10.0mm ²	AWG 7	10mm	YJ3.5-31-10.0AU	CT-4/10	RT-3.5

50A Female crimp contact

For WS / WF / WY32-55

Wire size		Stripping length	Female crimp contact p/n	Crimping tool p/n	Removal tool p/n
1.5mm ²	AWG 16	10mm	YK3.5-27.6-1.5AU	CTW-0.14/4	RT-3.5
2.5mm ²	AWG 14	10mm	YK3.5-27.6-2.5AU	CTW-0.14/4	RT-3.5
4.0mm ²	AWG 12	10mm	YK3.5-27.6-4.0AU	CTW-0.14/4 CT-4/10	RT-3.5
6.0mm ²	AWG 10	10mm	YK3.5-27.6-6.0AU	CT-4/10	RT-3.5
10.0mm ²	AWG 7	10mm	YK3.5-27.6-10.0AU	CT-4/10	RT-3.5

Crimp tool and Removal tool

Crimp tool

For crimping the male / female contacts



Part number	Crimping wire range
CT-P20/28	0.08-0.52mm ² AWG 28-20
CTW-0.14/4	0.14-4mm ² AWG 25-11
CT-4/10	4-10mm ² AWG 11-7

Removal tool

For taking out male / female contacts



Part number	Removal range
RT-1.0	5A Male / Female crimp contact
RT-1.5	10A Male / Female crimp contact
RT-2.5	25A Male / Female crimp contact
RT-3.5	50A Male / Female crimp contact

Screw contact spec

SF20, SA20, WS20, WF20, WY20	2	3	4
Male contact face view			
Rated current (A)	10	10	10
Contact diameter(mm)	ø2.5X2	ø2.5X3	ø2.5X4
Rated voltage (AC.V)	500	500	500
Test voltage(AC.V) 1 min	1500	1500	1500
Contact resistance (mΩ)	1	1	1
Wire size (mm ² / AWG)	≤1.5/15	≤1.5/15	≤1.5/15
Insulation resistance (MΩ)	2000	2000	2000

SP21, SY21, WP20	2	3	4	5
Male contact face view				
Rated current (A)	10	10	10	10
Contact diameter(mm)	ø3×2	ø3×3	ø3×4	ø3×5
Rated voltage (AC.V)	500	500	500	500
Test voltage(AC.V) 1 min	1500	1500	1500	1500
Contact resistance (mΩ)	1	1	1	1
Wire size (mm ² / AWG)	≤1.5/15	≤1.5/15	≤1.5/15	≤1.5/15
Insulation resistance (MΩ)	2000	2000	2000	2000

WS24, WF24, WY24	2	3	4
Male contact face view			
Rated current (A)	10	10	10
Contact diameter(mm)	ø2.5X2	ø2.5X3	ø2.5X4
Rated voltage (AC.V)	500	500	500
Test voltage(AC.V) 1 min	1500	1500	1500
Contact resistance (mΩ)	1	1	1
Wire size (mm ² / AWG)	≤1.5/15	≤1.5/15	≤1.5/15
Insulation resistance (MΩ)	2000	2000	2000

SA28, SP29, SY29 WS28, WF28, WY28	2	3	4	7	8	10
Male contact face view						
Rated current (A)	32	32	10	10	10	10
Contact diameter(mm)	ø3.5X2	ø3.5X3	ø2.5X4	ø2.5X7	ø2.5X8	ø2.5X10
Rated voltage (AC.V)	500	500	500	500	500	500
Test voltage(AC.V) 1 min	1500	1500	1500	1500	1500	1500
Contact resistance (mΩ)	0.5	0.5	1	1	1	1
Wire size (mm ² / AWG)	≤6/10	≤6/10	≤1.5/15	≤1.5/15	≤1.5/15	≤1.5/15
Insulation resistance (MΩ)	2000	2000	2000	2000	2000	2000

